


CPTAU

Terminal preaislado bimetálico.
Bimetallic insulated terminal.

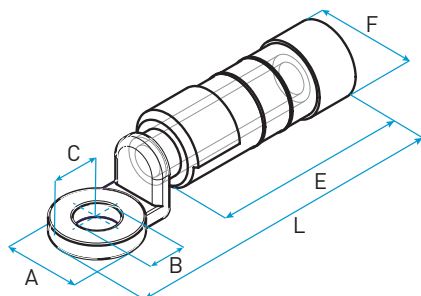

Material / Material:

Cuerpo: Aluminio 99.5%.

Placa: Cobre electrolítico 99.9%

Body: Aluminum (99.5%).

Tongue: Electrolytic Copper (99.9%).

Instructivo de aplicación

Video de producto

Los terminales CPTAU son fabricados en aluminio/cobre soldado por fricción, rellenos con grasa inhibidora y aislados (con junta de estanqueidad), permitiendo la conexión de líneas aéreas preensambladas en aluminio o cobre. Cantidad y orden de compresiones hexagonales indicados en la funda aislante.

CPTAU terminals are made by friction welding a copper plate to an aluminum body. Pre-filled with corrosion inhibiting compound and insulated, allowing for terminations of ABC type conductors. Order and quantity of hexagonal compressions are clearly indicated on the outer covering.

MODELO PART #	SECCIÓN mm ² CONDUCTOR mm ²	A (mm)	B	C	E	F	L	COLOR
CPTAU 25	25	20	13	10	36	18	100	
CPTAU 35	35	24	13	12	57	22	99,7	
CPTAU 50	50	24	13	12	57	22	99,7	
CPTAU 54	50 (neutro)	24	13	12	57	22	99,7	
CPTAU 70	70	24	13	12	57	22	99,7	
CPTAU 95	95	24	13	12	57	22	99,7	
CPTAU 120	120	30,5	13	15	61,5	26,5	115	
CPTAU 150	150	30,5	13	15	61,5	26,5	115	

Aplicación: Para realizar conexiones en cables de aluminio a cobre. Compresión hexagonal utilizando matriz R19-E173/E215 (herramientas HT240U / HEC-240 / MHEC-240 / MHEC-240S) o R18-E173/E215 (herramienta PH-6)

Application: For aluminum to copper terminations. Hexagonal compression (HT240U / HEC-240 / MHEC-240 / MHEC-240S tool with R18-E173/E215 die or PH-6 tool with R19-E173/E215 die).